



# TOUCH 'N SEAL®

## PROFESSIONAL FOAM SOLUTIONS

PREMIUM 1 & 2-COMPONENT SPRAY FOAM PRODUCTS





# 1-COMPONENT FOAM

DAP® Touch 'n Seal 1-Component polyurethane foam sealants are the most effective way to seal gaps and voids, and prevent energy loss from air infiltration. Patented aerosol valves deliver greater control and less waste. Each product has been designed to meet the requirements of the most demanding air-sealing applications.







## GUN FOAM II

Air Sealing & Fire Block

Item #: 7565000121  
Size: 24 oz Case Qty: 12

- Type V residential fire block sealant
- Distinctive orange color
- ICC-ES ESR-1926 approved
- Class A Fire Rated
- Interior and exterior use



Tech Data	
Density	1.3 – 1.8 pcf
R-Value	4-5
Tack-Free	10 minutes
Cuttable	Approx. 30 minutes
Cure	1 hour
ASTM E84	Flame Spread 15 Smoke Developed 15
Yield (1/4" bead)	3,200 linear ft
Shelf Life	18 months



## NO-WARP WINDOW & DOOR

Air Sealing & Fire Block

Item #: 7565029712  
Size: 20 oz Case Qty: 12

- Low expansion and pressure during cure for sealing windows & doors
- Meets AAMA 812-04
- ICC-ES ESR-1926 approved
- Class A Fire Rated
- Bright white color



Tech Data	
Density	1.3 – 1.8 pcf
R-Value	4.5
Tack-Free	10 minutes
Cuttable	30 minutes
Cure	1 hour
ASTM E84	Flame Spread 10 Smoke Developed 15
Yield (1/4" bead)	2,100 linear ft
Shelf Life	18 months



## ALL SEASONS

Low Temperature Applications

Item #: 7565000044  
Size: 24 oz Case Qty: 12

- Suitable for use at temperatures as low as 20°F
- Type V residential fire block
- Low curing pressure – can be used to seal windows & doors
- ICC-ES ESR-1926 approved
- Class A Fire Rated
- Off-white color



Tech Data	
Density	1.9 +/- .10 pcf
R-Value	4.5
Tack-Free	10 minutes
Cuttable	Approx. 30 minutes
Cure	1 hour
ASTM E84	Flame Spread 10 Smoke Developed 15
Yield (1/4" bead)	2,230 linear ft
Shelf Life	18 months

# SPECIALTY FORMULATIONS

DAP Touch 'n Seal offers superior 1-Component specialty formulas for indoor and outdoor applications. Pest Control is a professional-grade foam sealant specially formulated to stop mice and other pests from entering buildings. Black Foam is a high performance UV-resistant gun foam specially formulated to blend in with RV, automotive and landscape applications.

## 1-COMPONENT FOAM Polyurethane Foam Sealants



### PEST CONTROL Pest Blocking Sealant

- Olfactory deterrent protects foam from mouse attack
- Extreme temp. application (20°F to 120°F)
- Class A fire rated
- Safe to use and contains no lingering odor
- Interior only
- Gray color blends with surroundings



Item #: 7565000125  
Size: 24 oz Case Qty: 12

Tech Data	
R-Value	4-5
Tack-Free	5 minutes
Cuttable	<15 minutes
Cure	4 hours
ASTM E84	Flame Spread 10 Smoke Developed 15
Yield (1/4" bead)	1,972 linear ft
Shelf Life	18 months



### BLACK FOAM Polyurethane Foam Sealant & Adhesive

- Used for Landscaping applications such as retaining walls and water features
- Formulated to resist discoloration in exterior applications
- Air Sealing for RV/automotive applications
- Black color blends in with black piping and auto undercarriages
- Interior and exterior application



Item #: 7565029813  
Size: 24 oz Case Qty: 12

Tech Data	
Density	1.3 – 1.8 pcf
R-Value	4-5
Tack-Free	10 minutes
Cuttable	30 minutes
Cure	1 hour
ASTM E84	Flame Spread 15 Smoke Developed 25
Yield (1/4" bead)	3,200 linear ft
Shelf Life	18 months





## FIREBLOCK

### Flame Resistant Sealant

Item #: 7565010030  
Size: 12 oz Case Qty: 12

- Flame resistant, all-purpose foam sealant
- Fills & seals service penetrations
- Blocks air infiltration reducing flame spread into walls & ceilings
- Orange color quickly identifies FIREBLOCK for visual inspection
- Excellent performance in modified ASTM E-814 & UL-1715 tests
- Self-extinguishing formula
- UL94 Flammability Test - pass best rating V-0
- Interior applications



#### Tech Data

Density	1.3 – 1.8 pcf
R-Value	4-5
Tack-Free	10 minutes
Cure	1 hour
ASTM E84	Flame Spread 5 Smoke Developed 0
Yield (1/4" bead)	270 linear ft
Shelf Life	12 months



## QUICK CURE

### Straw & Canister Foam

- Aerosol with reusable applicator straw & adapter included
- Cylinder available with 10 ft hose & applicator
- Weather-resistant bond seals out drafts and moisture
- ICC-ES ESR-1926 approved
- Class A Fire Rated
- Off-white color



#### Tech Data

Density	1.75 +/- .25 pcf
R-Value	4.9 / 4-5 (Low GWP)
Tack-Free	Can: <30 minutes; Cylinder: 15 minutes
Cutttable	1 hour
Cure	4 hours
ASTM E84	Can: Flame Spread 10 Smoke Developed 15 Cylinder: Flame Spread 20 Smoke Developed 25
Shelf Life	18 months



Item #	Description	Case Qty
7565000057	QC HY Straw Foam, 12 oz	12
7565000058	QC HY Straw Foam, 24 oz	12
7565000062	QC HY Cylinder, 10 lb	1
7565000064	QC HY Cylinder, 16 lb	1
7565000063	QC RX Cylinder, 10 lb	1
7565000065	QC RX Cylinder, 16 lb	1
7565000066	QC HY Cylinder, 10 lb (Low GWP)	1
7565000068	QC HY Cylinder, 16 lb (Low GWP)	1
7565000067	QC RX Cylinder, 10 lb (Low GWP)	1
7565000069	QC RX Cylinder, 16 lb (Low GWP)	1



# 2-COMPONENT FOAM

DAP Touch 'n Seal foam kits are 2-Component low-pressure spray-applied or pour-in-place polyurethane foam systems for air sealing and insulating residential, commercial, industrial and agricultural structures. DAP 2-Component foam solutions are easy to use and cure quickly to provide higher insulation values and air sealing qualities.



## **NEW P2 MAX ANTI-CROSSOVER APPLICATOR**

*Improved speed consistency from start to finish*







# LOW GWP

GLOBAL WARMING POTENTIAL

## SUPERIOR INSULATING PERFORMANCE LESS IMPACT ON THE ENVIRONMENT



## WHAT IS GWP?

Global Warming Potential (GWP) is a measurement that is used to compare how different gases impact the Earth's atmosphere. Specifically, it measures how much energy the emissions of a particular gas will absorb over time compared to Carbon Dioxide, which has a standard of 1. The lower the number, the better for the environment.

## OUR MISSION

DAP is committed to reducing our impact on the environment by meeting GWP requirements for our 1 & 2-Component spray foam products – but we didn't stop there. In our constant effort to bring only the best products to market, we pushed the boundaries to deliver on a higher R-value rating, significantly improved our foam quality and completely redesigned our applicator to increase spray speed and ratio performance.



# 2-COMPONENT FOAM DISPENSING SYSTEMS & FORMULAS

## FOAM KITS

Professional Polyurethane Foam Systems

### Foam Kit 15



### Foam Kit 15 Low GWP



- Ideal for sealing small gaps, cracks and holes
- Yields up to 15 board feet\*
- Easily portable, fully disposable

\*A board foot is 12" wide x 12" high x 1" thick

### Foam Kit 200

Rip 'n Go Handle



### Foam Kit 200 Low GWP



- Ideal for medium size projects such as sealing basement sill plates/band joists
- Blend of product yield & portability (single carton design with built in carrying case)
- Yields up to 200 board feet\*
- Includes 10' hoses & 10 nozzles

### Foam Kit 600



### Foam Kit 600 Low GWP



- Ideal for large projects such as insulating attic rafters or stud wall cavities up to 2"
- Yields up to 600 board feet\*
- Includes 15' hoses & 10 nozzles

## REFILLABLES

Returnable Cylinders

- Best for OEM operations
- Low replacement cost
- 1.75 PCF Refills in Standard, ICC & Slow Rise, available in 3 sizes: 17 gallon, 60 gallon & 120 gallon
- Class A Fire Rated





## 1.75 PCF FR STANDARD - Closed Cell

Touch 'n Seal 2-Component 1.75 PCF FR Standard foam is a closed cell spray foam insulation that provides ASTM E-84 Class A Fire Rating as well as thermal insulating and sound attenuating properties.



Item #	Description	Coverage* bd ft
7565020015	Foam Kit 15	15
7565020110	Foam Kit 110	110
7565000054	Foam Kit 200	200
7565000056	Foam Kit 600	600
7565020601	Foam Kit 600 Replacement	600
7565051000	Refill RF-17	1,980
7565060000	Refill RF-60	6,840
7565051200	Refill RF-120	11,400

Tech Data	
Density	1.75 pcf
R-Value**	5.5
Dry/Tack-Free	30-60 seconds
Cutttable	5 minutes
Cure Time	Approx. 1 hour
Closed Cell	Yes
ASTM E84 @2" thick (51mm)	Flame Spread 25 Smoke Developed 350
Shelf Life	15 months

## 1.75 PCF FR ICC - Closed Cell

Touch 'n Seal 2-Component 1.75 PCF ICC foam is a closed cell spray foam insulation that provides ASTM E-84 Class A Fire Rating and complies with ICC Evaluation Services listing ESR-3052.



Item #	Description	Coverage* bd ft
7565001200	Foam Kit 200	200
7565021600	Foam Kit 600	600
7565021601	Foam Kit 600 Replacement	600
7565010000	Refill RF-17	1,980
7565066000	Refill RF-60	6,840
7565013000	Refill RF-120	11,400
7565002015	Foam Kit 15 (Low GWP)	15
7565002110	Foam Kit 110 (Low GWP)	110
7565002200	Foam Kit 200 (Low GWP)	200
7565002600	Foam Kit 600 (Low GWP)	600
7565000750	CP-750	750
7565002750	CP-750 (Low GWP)	750

Tech Data	
Density	1.75 pcf
R-Value**	6.2/6.6 (Low GWP)
Dry/Tack-Free	30-60 seconds
Cutttable	5 minutes
Cure Time	Approx. 1 hour
Closed Cell	Yes
ASTM E84 @2" thick (51mm)	Flame Spread 15 Smoke Developed 350
Shelf Life	15 months

## 1.75 PCF SLOW RISE 120 - Closed Cell

Touch 'n Seal Slow Rise 120 is designed for pour-in-place applications where foam needs to completely fill cavities or spaces without creating voids or excessive pressure. Slow Rise 120 is an ASTM E84 Class A rated foam and meets the U.S. Coast Guard requirements for flotation material (33 CFR 183.144).



Item #	Description	Coverage* bd ft
7565022120	Foam Kit 200	200
7565026120	Foam Kit 600	600
7565020120	Refill RF-17	1,980
7565061120	Refill RF-60	6,840
7565014120	Refill RF-120	11,400

Tech Data	
Density	1.75 pcf
R-Value**	5.57
Dry/Tack-Free	Gel time 120 seconds
Cutttable	10-20 minutes
Cure Time	Approx. 1 hour
Closed Cell	Yes
ASTM E84 @2" thick (51mm)	Flame Spread 20 Smoke Developed 350
Shelf Life	15 months

\*Theoretical Coverage/Yield

\*\* The higher the R-value the greater the insulating power.  
Ask your seller for the fact sheet on R-values.



## 1.0 PCF FR STANDARD - Open Cell

Touch 'n Seal Low Density 1.0 PCF Spray Foam is an open-cell, non-structural air sealing and insulating foam. Due to its low density, more expansion will occur - approximately 10-12 times the dispensed froth.



Item #	Description	Coverage* bd ft
7565020300	Foam Kit 300	300
7565021000	Foam Kit 1000	1,000
7565050120	CP-1200	1,200
7565026300	Foam Kit 300 (Low GWP)	300
7565011000	Foam Kit 1000 (Low GWP)	1,000

Tech Data	
Density	1.0 pcf
R-Value per inch (Aged)** ASTM C518	4.1/3.9 (Low GWP)
Dry/Tack-Free	30-60 seconds
Cutttable	5 minutes
Cure Time	Approx. 1 hour
Closed Cell	No
ASTM E84 Surface Burning	Flame Spread 25 Smoke Developed 350
Shelf Life	12 months

## 2.0 PCF FR ICC - Closed Cell

Touch 'n Seal 2.0 PCF Spray Foam is suitable for use in both commercial and recreational watercraft. It offers increased structural strength, superior sound control and excellent thermal insulation.



Item #	Description	Coverage* bd ft
7565026100	Foam 1800 Refillable	1,800
7565026060	Foam 6000 Refillable	6,000
7565056120	Foam 13500 Refillable	13,500
7565000660	CP-660	660

Tech Data	
Density	2.0 pcf
R-Value per inch (Aged)** ASTM C518	5.1
Dry/Tack-Free	30-60 seconds
Cutttable	2-5 minutes
Cure Time	Approx. 1 hour
Closed Cell	Yes
ASTM E84 Surface Burning	Flame Spread 20 Smoke Developed 350
Shelf Life	12 months

## 3.0 PCF FR ICC - Closed Cell

Touch 'n Seal 3.0 PCF is a high compressive strength foam for use in new installations and for repairs or renovations of existing spray foam roofs.



Item #	Description	Coverage* bd ft
7565023120	Foam Kit 120	120
7565021120	Foam Kit 120 (Low GWP)	120

Tech Data	
Density	3.0 pcf
R-Value per inch (Aged)** ASTM C518	5.9/6.8 (Low GWP)
Dry/Tack-Free	30-60 seconds
Cutttable	2.5 minutes
Cure Time	Approx. 1 hour
Closed Cell	Yes
Shelf Life	12 months
Compressive Strength	40 psi (2.81 kg/cm2)

\* Theoretical Coverage/Yield

\*\* The higher the R-value the greater the insulating power.  
Ask your seller for the fact sheet on R-values.

\* Theoretical Coverage/Yield

\*\* The higher the R-value the greater the insulating power.  
Ask your seller for the fact sheet on R-values.



# CONSTANT PRESSURE DISPENSING SYSTEM

Dispense foam up to twice as fast and with less waste than pressurized foam kits with DAP's single consolidated unit.

## AN AFFORDABLE SYSTEM FOR MID TO HIGH VOLUME PROJECTS

- Offers the convenience of Foam Kits with higher output & efficiency
- Application rate is adjustable and consistent
- Self-contained system does not require any additional equipment
- Disposable cylinders are easy to handle and change
- Ideal for mid-sized projects such as room additions, attics, rim joists, and crawl spaces



Watch the CPDS in action!



### Included in the system:

- 100' hose; foam applicator; on/off valves – fully assembled
- 2 replacement check valves
- Conical nozzles (25 pack)
- Fan nozzles (25 pack)
- Extra foam applicator with 12' hose
- Protective cover
- Forced air heating unit
- Extra pressure supply hoses (2)
- Wrenches – 9/16" & adjustable
- Operation manual
- A-side chemical particle filter

Item #	Description
7565000150	CPDS Series 2
7565070400	Applicator Kit, 12" hose-out (Refill / CPDS)
7565070500	30 ft. Hose Set (Refill / CPDS)
7565070600	100 ft. Hose Set (Refill / CPDS)
7565000170	Inline Filter Assembly

### Foam Products

Item #	Description
7565000750	CP-750 FR ICC 1.75 PCF
7565050120	CP-1200 FR Standard 1.0 PCF
7565002017	CP-660 2.0 PCF
7565002750	CP-750 1.75 PCF (Low GWP)



# HVAC FOAM

DAP Touch 'n Seal HVAC is a 2-Component low-pressure, spray-applied polyurethane foam. These HVAC foam products provide the ideal method to insulate the heating, ventilation and cooling systems in your building. HVAC foam can be sprayed directly on duct work to help maintain temperature and eliminate condensation that can lead to mold or mildew. HVAC foam reduces time, labor and increases overall savings.

## PORTABLE HVAC SOLUTIONS

### HVAC Foam Kit 200 FR ICC



- Ideal for smaller or hard to reach duct work, such as runouts and boots
- Includes 10' hose & 10 cone nozzles

### HVAC Foam Kit 600 FR ICC



- Ideal for duct diameter of 12-14" and greater trunk lines
- Includes 15' hose & 10 cone nozzles

Item #	Description	Coverage* bd ft
7565021045	HVAC Foam Kit 15 FR	15
7565021044	HVAC Foam Kit 200 FR ICC	200
7565021039	HVAC Foam Kit 600 FR ICC	600

Tech Data	
Density	1.75 pcf
R-Value**	5.5
Dry/Tack-Free	30-60 seconds
Cuttable	5 minutes
Cure Time	Approx. 1 hour
Closed Cell	Yes
ASTM E84 @2" thick (51mm)	Flame Spread 25 Smoke Developed 350
Shelf Life	15 months

## FOR LARGER PROJECTS

### CPDS Machine



- Offers the convenience of Foam Kits with higher output & efficiency
- Application rate is adjustable and consistent
- Self-contained system does not require any additional equipment
- 100% yield of foam when applied correctly

### HVAC Foam Kit CP-750 FR ICC



- For Use With CPDS Series 2
- Ideal for the completion of the entire job, consisting of a trunk, runouts and boots

Item #	Description	Coverage* bd ft
7565021038	HVAC Foam Kit CP-750 FR ICC	750
7565000150	CPDS Machine	N/A

Tech Data	
Density	1.75 pcf
R-Value**	5.57
Dry/Tack-Free	Gel time 120 seconds
Cuttable	10-20 minutes
Cure Time	Approx. 1 hour
Closed Cell	Yes
ASTM E84 @2" thick (51mm)	Flame Spread 20 Smoke Developed 350
Shelf Life	15 months

\* Theoretical Coverage/Yield

\*\* The higher the R-value the greater the insulating power. Ask your seller for the fact sheet on R-values.



# ROOF TILE ADHESIVES

Touch 'n Seal Storm Bond Roof Tile Adhesive is a high-performance, 1-Component, polyurethane adhesive used for attaching clay and concrete roof tile to approved substrates. Roof tiles installed with Storm Bond offer superior bonding strength compared to traditional methods of tile installation.

## STORM BOND® Roof Tile Adhesive

- Aerosol can & cylinder are easy to carry
- Great for spot repairs on roof
- Makes cut tile at valleys easier to install
- No ozone depleting chemicals



Tech Data	
Florida Certificate	FL14506
Walk on Time	2 hrs.
Full Cure Time	24 hrs.
TAS 101-95 Static Uplift Resistance	Pass
ASTM D-Compressive Strength Parallel to Rise Perpendicular to Rise	49.2 lb/in <sup>2</sup> (3.46 kg/cm <sup>2</sup> ) 41.68 lb/in <sup>2</sup> (2.93 kg/cm <sup>2</sup> )
ASTM D - 1623 Tinsile Strength	72.18 lb/in <sup>2</sup> (3.46 kg/cm <sup>2</sup> )
ASTM D-2126 Thermal & Humid Aging (-40°F, 14 days / 158°F, 100% Relative Humidity, 14 days)	0.1% 6.0%
Shelf Life	12 months



Item #	Description	Case Qty
7565029470	Storm Bond 24 oz Can	12
7565017170	Storm Bond 23 lb Cylinder	1

## STORM BOND® 2 Roof Tile Adhesive

Storm Bond 2 is a fast-curing, ultra-strong, 2-Component adhesive that virtually eliminates the need for nail and screw penetrations in the roof.

- Florida Certificate of Product Approval - FL21374-R1, FL22609-R1
- Miami Dade County Florida Product Control NOA - No. 17-0829.12
- Superior bonding strength
- Easy installation, reduces labor time
- Reduces tile breakage during installation



Tech Data	
Walk on Time	Several min.
Full Cure Time	24 hrs.
TAS 101-95 Static Uplift Resistance	Pass
ASTM D-Compressive Strength Parallel to Rise Perpendicular to Rise	20.3 lb/in <sup>2</sup> (140 kPa) 13.9 lb/in <sup>2</sup> (96 kPa)
ASTM D - 1623 Tinsile Strength	30.0 lb/in <sup>2</sup> (207 kPa)
ASTM D-2126 Thermal & Humid Aging (-40°F, 14 days / 158°F, 100% Relative Humidity, 14 days)	0.35% 4.7%
Shelf Life	12 months



### Refillable Cylinders

Item #	Description
7565070300	Storm Bond 2 Refill 17 Gallon Part-A
7565070400	Storm Bond 2 Refill 17 Gallon Part-B
7565070500	Storm Bond 2 Refill 60 Gallon Part-A
7565070600	Storm Bond 2 Refill 60 Gallon Part-B

### Disposable Kits

Item #	Description
7565071200	Storm Bond 2 SB200 Kit
7565017000	Storm Bond 2 SB600 Complete Kit



# SPECIALTY FOAM SEALANTS & ADHESIVES

## MINE BLOCK MORTAR

Mine Stopping Adhesive

Touch 'n Seal Mine Block Mortar bonds concrete and lightweight Autoclaved Aerated Concrete (AAC) blocks used for underground coal mine ventilation stoppings. Mine Block Mortar is a 1-Component polyurethane foam adhesive that cures rapidly to form a strong bond and air-seal between blocks. It is approved for use in underground coal mines with 6 inch or larger blocks.




- Cures and adheres to block within 30 minutes
- Bond Strength exceeds cement mortar (ASTM C1072)
- Retains full function after 1 hour fire test (ASTM E119)
- Not affected by moisture or temperature during curing
- Lightweight cylinders contain 20 lb of adhesive
  - Enough material for multiple stoppings
  - Reduces risk of strain injuries from heavy lifting
- 10 ft hose and applicator
- Eliminates the need for parge coating
- No tools or mixing required
- ASTM E84 Class A Fire Resistance

Item #	Description	Pallet Qty
7565017160	Mine Block Mortar w/ Applicator, 20 lb	50

## RIB & ROOF

Air & Moisture Control System

Touch 'n Seal Rib & Roof Polyurethane Sealant is a non-structural, 2-Component expanding foam that isolates coal seams from air and moisture to reduce scaling and spalling. By sealing the exposed coal, miner safety is increased.

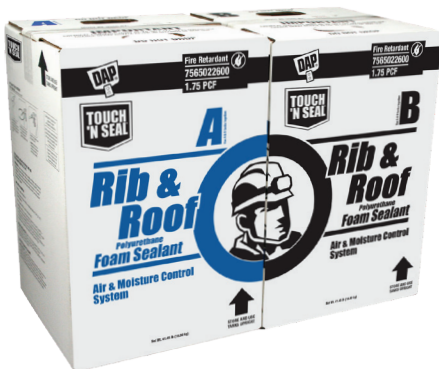

- Yields up to 1500 sq ft @ 3/8" thickness
- One person operation
- Stops spalling
- Stops air leaks in old seals and on stopping ribs
- Reduces dust
- Does not require pumps, water, compressors or supplied air
- ASTM E84 Class A Fire Resistance
- Reusable applicator with 30 ft hose
- No offensive odor during use or after cured
- Bright, reflective beige color

Item #	Description	Pallet Qty
7565022600	Rib & Roof Polyurethane Foam Sealant	32

# AIRSTOP ELASTOMERIC SEALANT

## Water-based Air Sealant

Energy codes continue to require greater energy efficiency & lower air exchange. Homeowners increasingly expect higher performance and lower costs. DAP AirStop is designed to be an easy-to-apply sealant for areas of potential air leaks in the building envelope.

- Helps achieve the air leakage requirements of the International Energy Conservation Code (IECC)
- Bridges and penetrates gaps for a tight air seal
- Remains flexible after curing for a lasting seal
- Material contains no solvents
- Easy clean-up with water
- Ready-to-use formula requires no mixing
- Available in 27 lb pail and 20 fl oz sausage pack



Watch the AirStop in action!



## Airless Sprayer Application



Sheathing Seam Seal




Stud Face to Drywall Gasket



Base Plate to Subfloor Seal

## Sausage Gun Application



AirStop can be bulk-loaded into a sausage gun for manual application.



Sausage gun is an easy alternative to using an airless sprayer.

### Tech Data

Tack Free	4 hours
Cure	18 hours
Gap Penetration	≥ 1/8 inch
Gap Bridging	≤ 3/8 inch
VOC Content	1.2 g/L
Shelf Life	18 months unopened
ASTM E84	Flame Spread 25 Smoke Developed 50
Application Temp	20° – 120°F

Item #	Description	Case Qty
7565050005	Air Stop 27 lb Pail	1
7565051005	Air Stop 20 fl oz Sausage	12



## LINER BOND

DAP Touch 'n Seal Liner Bond Foam Adhesive is a 1-Component foam adhesive used inside refrigerated trailers to bond fiberglass liners to prepared spray foam insulation and aluminum posts. Liner Bond offers total liner adhesion with a 30 minute dry-time, allowing time for proper liner placement. This portable, disposable, gun-applied adhesive is ideal for new trailers, repairs in hard to reach areas, and to help return damaged trailers to original insulation efficiency.



### Tech Data

Tack-Free	30 minutes
Cure	Approx. 24 Hours
Yield (1/4" bead)	275 sq ft
Shelf Life	18 months

Item #	Description	Type
7565017100	Liner Bond 23 lb	Complete
7565017101	Liner Bond 23 lb	Replacement



# 1-COMPONENT FOAM APPLICATORS & ACCESSORIES

## 1-COMPONENT APPLICATORS & ACCESSORIES

### Sharpshooter-X

- Adjustable output for precise control of bead size
- Coated non-stick basket



Item #	Description
7565010608	Sharpshooter-X Applicator

### Sharpshooter-D

- Adjustable output for precise control of bead size
- Economical, disposable



Item #	Description
7565000172	Sharpshooter-D Applicator, Six Pack

### 1-Component Bottom Load Applicator

- Adjustable output for precise control of bead size



Item #	Description
7565010629	1-Component Bottom Load Applicator
7565029952	Brass Tip Extension

### Long Barrel Applicators

- Adjustable output for precise control of bead size
- Coated non-stick basket



Item #	Description
7565010028	28" Long Barrel Applicator
7565010639	46" Long Barrel Applicator

### Wand Applicator

- Adjustable output for precise control of bead size



Item #	Description
7565093315	10 ft Wand Applicator, Hose (Cylinder)

### Poly-Clean

Polyurethane Foam Cleaner


- Cleans wet foam from tools and applicators
- Attaches directly to applicator basket to flush barrel
- Nozzle allows spray directly from can



Item #	Description
7565012000	Poly-Clean Foam Cleaner, 12 oz

# 2-COMPONENT FOAM ACCESSORIES

## REFILLABLE ACCESSORIES

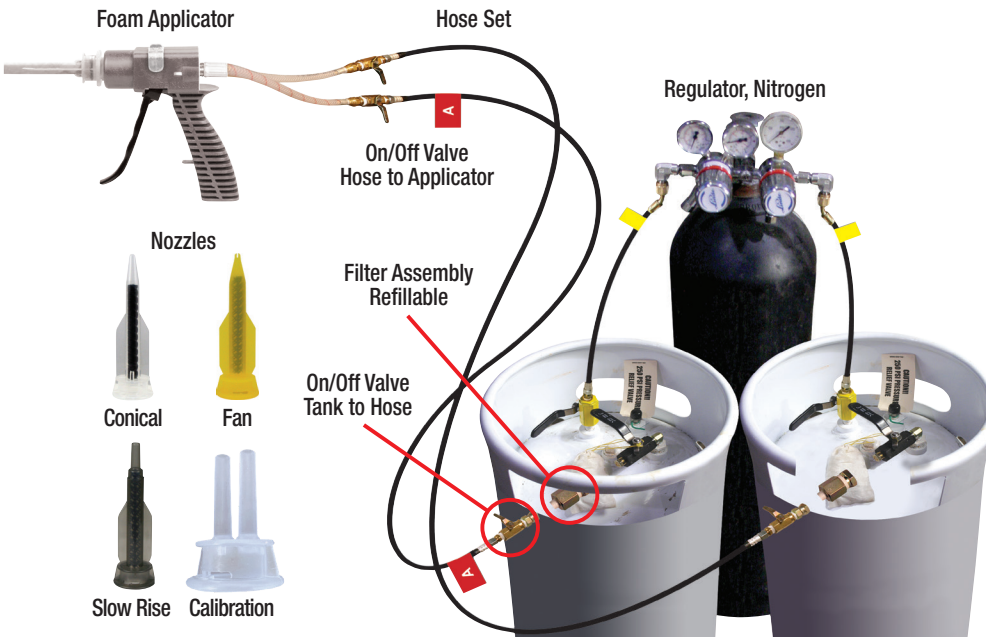

Item #	Description	Pack/Fill
7565000012	Foam Applicator w/ 12" (30cm) Hoses	1
7565000035	Foam Applicator w/ 60' (18m) Hose Kit	1
7565000045	Hose Set - 30' (9m) - Refillable	1
7565000075	Hose Set - 150' (49m) - Refillable	1
7565000025	Filter Assembly - Refillable	2
7565000040	On/Off Valve - Tank to Hose	2
7565000035	60 ft Hose Assembly with WHITE Applicator (Refill)	1
7565090327	15 ft YELLOW Applicator w/Std Accessory Pack	1
7565090337	30 ft YELLOW Applicator w/Std Accessory Pack	1
7565029930	Nozzle Pack, Clear – Conical	25 per pack
7565029940	Nozzle Pack, Yellow – Fan	25 per pack
7565029968	Nozzle Pack, Black – Slow Rise	25 per pack
7565010065	Regulator - Nitrogen	1
7565000080	Nozzle Kit - Calibration	25 per pack

## CPDS ACCESSORIES

### Included with CPDS system



100 Chemical Delivery  
Hose Set



50 Disposable  
Spray Nozzles  
(25 fan; 25 conical)



4 Extra  
Check Valves




2 Extra Air Pressure  
Supply Hoses

### Items that can be purchased separately

Item #	Description	Case Qty
7565000012	Applicator Kit, 12" hose-out (Refill / CPDS)	1
7565000045	30 ft Hose Set (Refill / CPDS)	1
7565001100	100 ft Hose Set (Refill / CPDS)	1
7565000110	Heater Unit	1
7565000105	Cover	1
7565029940	Nozzle Pack, Yellow – Fan	25 per pack
7565029930	Nozzle Pack, Clear – Conical	25 per pack

### Cover and Forced Air Heating Unit Warm Entire System

Cover



Heater Unit



# PRODUCT SPECIFICATIONS

Item #	Description	Case Qty	Pallet Qty
<b>1-COMPONENT SEALANTS</b>			
7565000044	All Seasons Gun Foam, 24 oz	12	72
7565010030	Fireblock Straw Foam, 12 oz	12	108
7565000121	Gun Foam II, 24 oz	12	72
7565029712	No-Warp Gun Foam, 20 oz	12	72
7565000125	Pest Control Gun Foam, 24 oz	12	72
7565029813	Black Gun Foam, 24 oz	12	72
7565029470	Storm Bond Foam, 24 oz	12	72
7565017170	Storm Bond Cylinder, 23 lb	1	50
7565000057	Quick Cure HY Straw Foam, 12 oz	12	108
7565000058	Quick Cure HY Straw Foam, 24 oz	12	72
7565000062	Quick Cure HY Cylinder, 10 lb	1	90
7565000064	Quick Cure HY Cylinder, 16 lb	1	50
7565000063	Quick Cure RX Cylinder, 10 lb	1	90
7565000065	Quick Cure RX Cylinder, 16 lb	1	50
7565050005	AirStop, 27 lb pail	1	36
7565051005	AirStop, 20 fl oz sausage	12	48
<b>LOW GWP 1-COMPONENT SEALANTS</b>			
7565000066	Quick Cure HY Cylinder, 10 lb Low GWP	1	90
7565000068	Quick Cure HY Cylinder, 16 lb Low GWP	1	50
7565000067	Quick Cure RX Cylinder, 10 lb Low GWP	1	90
7565000069	Quick Cure RX Cylinder, 16 lb Low GWP	1	50
<b>1-COMPONENT APPLICATORS AND ACCESSORIES</b>			
7565000172	Sharpshooter-D Applicator, Six Pack	6	-
7565010608	Sharpshooter-X Applicator	1	-
7565010629	1-Component Bottom Load Applicator	1	-
7565010028	28" Long Barrel Applicator	1	-
7565010639	46" Long Barrel Applicator	1	-
7565029952	Brass Tip Extension	1	25
7565093315	10 ft Wand Applicator, Hose (Cylinder)	1	-
7565012000	Poly-Clean Foam Cleaner, 12 oz	12	108



Item #	Description	Case Qty	Pallet Qty
<b>2-COMPONENT FOAM KITS</b>			
7565020015	Foam Kit 15 FR Standard 1.75 PCF ICC	12	24
7565020110	Foam Kit 110 FR Standard 1.75 PCF ICC	1	36
7565000054	Foam Kit 200 FR Standard 1.75 PCF ICC	1	36
7565000056	Foam Kit 600 FR Standard 1.75 PCF ICC	1	32
7565001200	Foam Kit 200 FR ICC 1.75 PCF ICC	1	36
7565021600	Foam Kit 600 FR ICC 1.75 PCF ICC	1	32
7565021601	Foam Kit 600 FR ICC 1.75 PCF ICC, Replacement	1	32
7565022120	Foam Kit 200 Slow Rise 120 1.75 PCF ICC	1	36
7565026120	Foam Kit 600 Slow Rise 120 1.75 PCF ICC	1	32
7565020300	Foam Kit 300 FR Standard 1.0 PCF	1	36
7565021000	Foam Kit 1000 FR Standard 1.0 PCF	1	32
7565020170	Foam Kit 170 FR Standard 2.0 PCF	1	36
7565023120	Foam Kit 120 FR Standard 3.0 PCF	1	36
<b>LOW GWP 2-COMPONENT FOAM KITS</b>			
7565002015	Foam Kit 15 1.75 PCF Low GWP ICC	12	48
7565002110	Foam Kit 110 1.75 PCF Low GWP ICC	1	36
7565002200	Foam Kit 200 1.75 PCF Low GWP ICC	1	36
7565002600	Foam Kit 600 1.75 PCF Low GWP ICC	1	16
7565026300	Foam Kit 300 1.0 PCF Low GWP	1	36
7565011000	Foam Kit 1000 1.0 PCF Low GWP	1	24
7565021120	Foam Kit 120 3.0 PCF Low GWP	1	36
<b>2-COMPONENT CPDS FOAM KITS</b>			
7565000750	CP-750 FR ICC 1.75 PCF ICC	1	18
7565050120	CP-1200 FR Standard 1.0 PCF	1	18
<b>2-COMPONENT CPDS LOW GWP FOAM KIT</b>			
7565002750	Foam Kit CP-750 1.75 PCF Low GWP ICC	1	24



# PRODUCT SPECIFICATIONS

Item #	Description	Case Qty	Pallet Qty
<b>2-COMPONENT FOAM ADHESIVE KITS</b>			
7565071200	Storm Bond 2 - 200 Kit	1	36
7565017000	Storm Bond 2 - 600 Kit	1	16
<b>2-COMPONENT REFILL FOAM ADHESIVE KITS</b>			
7565070300	Storm Bond 2 Refill 17 Gallon Part-A	1	6
7565070400	Storm Bond 2 Refill 17 Gallon Part-B	1	6
7565070500	Storm Bond 2 Refill 60 Gallon Part-A	1	2
7565070600	Storm Bond 2 Refill 60 Gallon Part-B	1	2
<b>HVAC FOAM KITS</b>			
7565021044	HVAC Foam Kit 200 FR ICC	1	36
7565021039	HVAC Foam Kit 600 FR ICC	1	16
7565021038	HVAC Foam Kit CP-750 FR-ICC	1	18
<b>2-COMPONENT REFILL FOAM KITS</b>			
7565051000	RF-17 FR Standard 1.75 PCF	1	1
7565060000	RF-60 FR Standard 1.75 PCF	1	1
7565051200	RF-120 FR Standard 1.75 PCF	1	1
7565010000	RF-17 FR ICC 1.75 PCF	1	1
7565066000	RF-60 FR ICC 1.75 PCF	1	1
7565013000	RF-120 FR ICC 1.75 PCF	1	1
7565020120	RF-17 Slow Rise 120 1.75 PCF	1	1
7565061120	RF-60 Slow Rise 120 1.75 PCF	1	1
7565014120	RF-120 Slow Rise 120 1.75 PCF	1	1

Item #	Description	Case Qty	Pallet Qty
<b>2-COMPONENT APPLICATORS AND ACCESSORIES</b>			
7565000150	CPDS Series 2	1	-
7565000012	Applicator Kit, 12" hose-out (Refill / CPDS)	1	-
7565000045	30 ft Hose Set (Refill / CPDS)	1	-
7565001100	100 ft Hose Set (Refill / CPDS)	1	-
7565000170	Inline Filter Assembly	1	-
7565000035	60 ft Hose Assembly with WHITE Applicator (Refill)	1	-
7565090327	15 ft YELLOW Applicator w/Std Accessory Pack	1	-
7565090337	30 ft YELLOW Applicator w/Std Accessory Pack	1	-
7565029930	Nozzle Pack, Clear – Conical	25	-
7565029940	Nozzle Pack, Yellow – Fan	25	-
7565029968	Nozzle Pack, Black – Injection	25	-
7565090691	FK-15 Nozzle Kit	30	-







**ON THE JOB**  

---

**SINCE 1865**<sup>TM</sup>